



IF IN DOUBT, ASK

THIRD ANGLE PROJECTION





TOLERANCES UNLESS OTHERWISE STATED  
 GENERAL TOLERANCES RIGHT ANGLE BENDS &  
 NO DEC. PLACE +/-1.0mm OTHER ANGLES +/-1°  
 ONE DEC. PLACE +/-0.3mm MACHINED DIAMETERS  
 TWO DEC. PLACE +/-0.1mm CONCENTRIC WITHIN  
 +/-0.1mm T.I.R.  
 SCREW THREADS ARE ISO METRIC COARSE PITCH  
 TOL. 6g/6H (MED. FIT) TO BS3643  
 WIRE DIA./PLATE THICKNESS TO COMMERCIAL LIMITS  
 GEOMETRICAL TOLERANCING TO BS308 PART 3

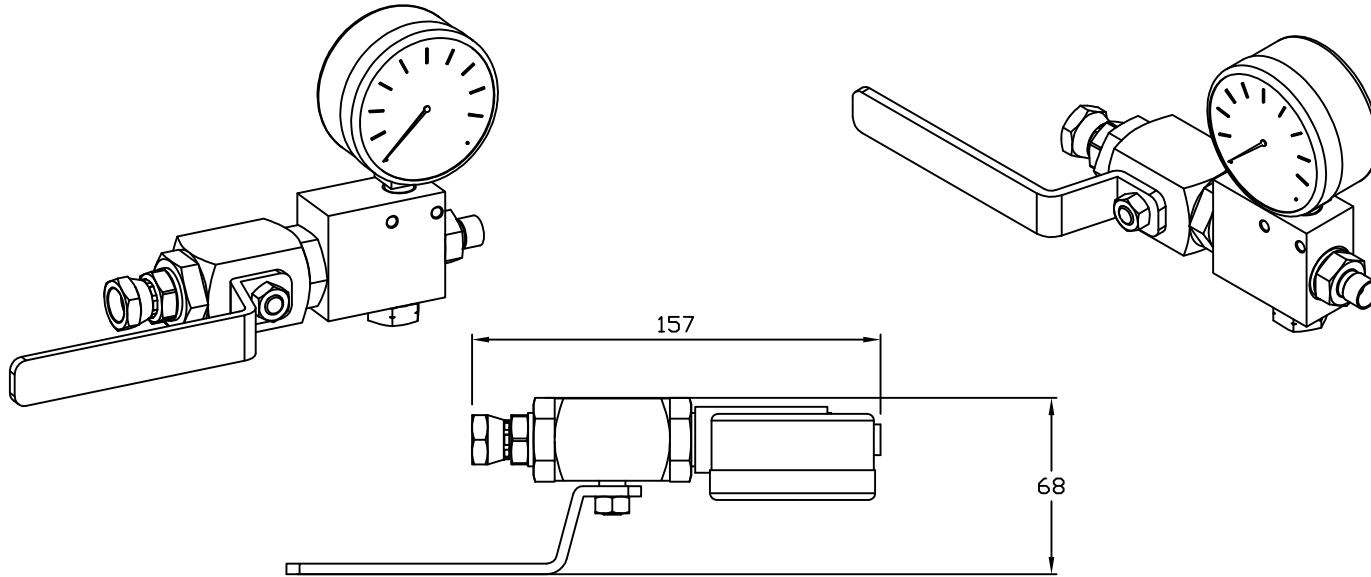


NOTES:

1. THIS DRAWING IS FOR ILLUSTRATION ONLY, ORDER UNDER THE CATALOGUE CODE "MSD" AS DESCRIBED ON THE DATASHEET 521000600
2. MATERIALS OF CONSTRUCTION:  
 MANIFOLD & FITTINGS 316 STAINLESS STEEL  
 GAUGE IS 304 CASE, 316 WETTED PARTS, PLASTIC FACE. CONSULT FACTORY FOR OPTIONS  
 BONDED WASHERS STAINLESS AND ELASTOMER  
 COPPER SEALING WASHERS ON GAUGE
3. MULTIPLE PRESSURE RANGES UP TO 700BAR AVAILABLE
4. QUARTER TURN BALL VALVE IS BUBBLE TIGHT
5. MASS 1.2KG est.

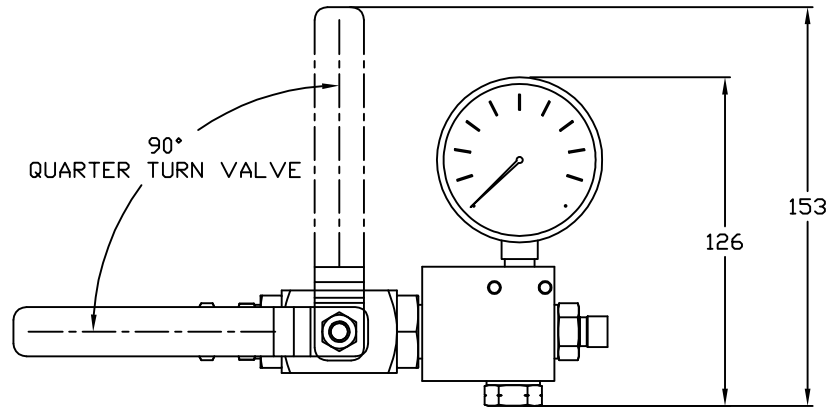

UNLESS OTHERWISE STATED:  
 DIMENSIONS IN MILLIMETRES  
 SURFACE FINISH IN MICROMETRES  
 REMOVE SHARP EDGES

© COPYRIGHT 2023 SARUM HYDRAULICS LTD.

					SARUM HYDRAULICS LTD. SALISBURY, SP4 6EB, UK www.sarum-hydraulics.co.uk	DRAWN	NATO	APP	
									CHKD
						SCALE	F	SIZE	
								SHEET OF	
						CAD	2-D	521000100	
				TITLE		DRAWING NO.			
				SHUT OFF VALVE ASSEMBLY			521000100		
1		FIRST ISSUE	09/23	MATERIAL PER NOTES					
ISSUE	D.C.N.	CHANGE DESCRIPTION & DATE	DATE IMPLEMENTED	FINISH --					