




IF IN DOUBT, ASK THIRD ANGLE PROJECTION




TOLERANCES UNLESS OTHERWISE STATED
GENERAL TOLERANCES RIGHT ANGLE BENDS &
NO DEC. PLACE $\pm 1.0\text{mm}$ OTHER ANGLES $\pm 1^\circ$
ONE DEC. PLACE $\pm 0.3\text{mm}$ MACHINED DIAMETERS
TWO DEC. PLACE $\pm 0.1\text{mm}$ CONCENTRIC WITHIN
 $\pm 0.1\text{mm}$ T.I.R.
SCREW THREADS ARE ISO METRIC COARSE PITCH
TOL. 6g/6H (MED. FIT) TO BS3643
WIRE DIA./PLATE THICKNESS TO COMMERCIAL LIMITS
GEOMETRICAL TOLERANCING TO BS308 PART 3




AIR REGULATOR CONTROLS
1/4BSP FEMALE INLET
COMPRISED OF:
SHUT OFF VALVE
FILTER / REGULATOR WITH PRESSURE GAUGE
FLOW CONTROL VALVE




10 LITRE PORTABLE RESERVOIR SHOWN
ALTERNATIVE RESERVOIRS AVAILABLE, CONSULT DATASHEET



CARRY HANDLE

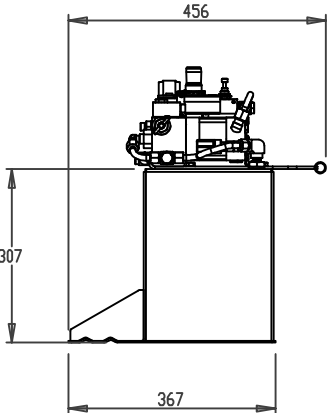


HYDRAULIC PRESSURE GAUGE FITTED
HYDRAULIC HOLD / RELEASE VALVE
1/4BSP MALE CONED PRESSURE OUTLET



- NOTES:
- THIS DRAWING SHOWS A TYPICAL PUMP CONFIGURATION WITH RESERVOIR, AND ACCESSORIES AS SHOWN
 - OPERATING FLUID: MINERAL OIL OR WATER
 - DIMENSIONS IN mm
 - MATERIALS OF CONSTRUCTION:
ANODISED ALUMINIUM EXTERNAL,
STAINLESS STEEL WETTED PARTS BS970 316 PLUS AMOUNTS OF 303,304,302,431,420
PLATED STEEL
NYLON, ACETAL
SEALS: NITRILE, FILLED PTFE, PTFE, UHMW, POLYURETHANE
FILLER BREATHER: POLYAMIDE BASED TECHNOLOGY
COMPLETE ASSEMBLY MASS: 12kg EST.
 - OPERATING TEMPERATURE -20 TO $+80$ DEG C SUBJECT TO FLUID
 - ENSURE USED IN ACCORDANCE WITH MANUAL HANDLING GUIDELINES AND REGULATIONS, PLUS STATUTORY AND OTHER REQUIREMENTS
 - CONSULT DATASHEET FOR ORDERING CODES

HYDRAULIC CIRCUIT

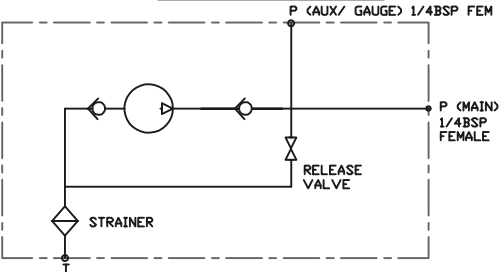

UNLESS OTHERWISE STATED:
DIMENSIONS IN MILLIMETRES
SURFACE FINISH IN MICROMETRES
REMOVE SHARP EDGES

© COPYRIGHT 2026 SARUM HYDRAULICS LTD.

					SARUM HYDRAULICS LTD. SALISBURY, SP4 6EB, UK www.sarum-hydraulics.co.uk	DRAWN Nat0	ISSUED Nat0
						SCALE F SIZE	SHEET 1 OF 1
						CAD 2-D 336300100	
						DRAWING NO.	
3	---	DEV MODS	N.D 08/26	TITLE INST DG: PTR-X TYPICAL INSTALLATION MATERIAL PER NOTES FINISH CLEAN		336300100	
2	---	DEV MODS	N.D 08/26				
1		FIRST ISSUE	08/26				
ISSUE	D.C.N.	CHANGE DESCRIPTION & DATE	DATE IMPLEMENTED				